




# ULTRA 1

## DATA SHEET

THE DISSUASIVE PROCESS FOR BIRDS REMOVAL



Deter pigeons from landing, roosting and nesting with DEPIGEONAL®; ideal for cornices, window ledges, louvers, terraces, rooftops, columns, sculptures and more.

### MAIN FEATURES :

- Economical
- Ready to use
- Stainless steel spikes, quality spring 1 800 N/mm<sup>2</sup>
- Several models available
- Polycarbonate support, mass UV-stabilised and 100% virgin polycarbonate base
- Anti-UV treated and anti-fungal silicone SELFIXING® 280 ml

### TECHNICAL DATAS : ULTRA 1

- 3 units for 1 linear meter
- Size of unit : length 31 x width 5,5 x height 11cm.
- Mass UV-stabilised and 100% virgin polycarbonate base (thermal resistance -100°C to +120°C)
- 18 spikes in 1 row, so 54 spikes per meter.
- Stainless steel 302 grade or Steelinox®+Ø 1,3mm spikes.
- The cells and the grained appearance under the polycarbonate base, ensure better adhesion of the bonding surface.
- Orifices on strips : for screwing or nailing
- Width protected : 5,5cm to 10,5cm.
- Protection : pigeons, crows, magpies.

### PACKAGING :

- 40 linear meter, so 128 units.
- Packaging dimensions : 35x 35x 35cm box for 5,14 kg.

### DEPIGEONAL® RECOMMENDATIONS :

- On large surfaces, protect the perimeter well and leave a maximum of 5 cm between any two units. ❶
- Never use this product on greasy or damp surfaces, or where the ambient temperature is below 5°C.
- Never apply on areas which are (or will be) treated with waterproof. In general, check the compatibility between the products you use with our deterrent technique.

**Adhesive :** We recommend our SELFIXING® silicone adhesive, which is specially suited to use with DEPIGEONAL®.

**Cleaning :** To optimise the preparation of surfaces and to obtain a better guarantee, cleaning with our professional cleaner SELCLEANING®.

**Guarantee :** Refer to our website.







### APPLICATION :

- DEPIGEONAL® can be applied to any surface (stone, wood, zinc, concrete, and more) with silicone, screws or nail.
- Before application the surface must be clean, dry, sound and solid.

### INSTRUCTIONS FOR USE :

- Once in the caulk gun, with a pair of scissors, cut off the tip of the silicone cartridge. ❶
- Apply the SELFIXING® silicone in an even line underneath the base as shown in the figure. ❷
- Press DEPIGEONAL® in place on the edge of surface to be protected. The SELFIXING® silicone should emerge through the triangular shaped holes on the base. ❸

- DEPIGEONAL®'s length allows for easy application : use 3 units per meter. It is easy to snap. ❹
- DEPIGEONAL® down to size at the appropriate line ❺

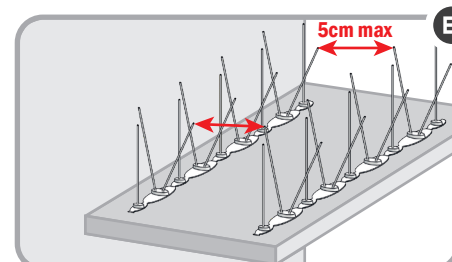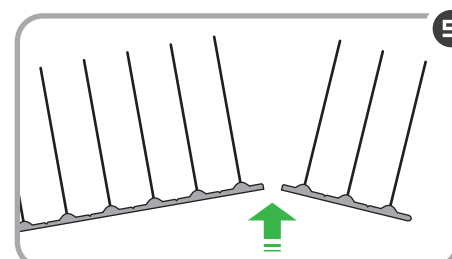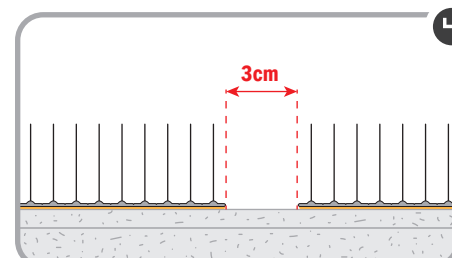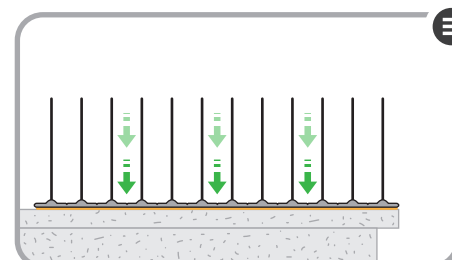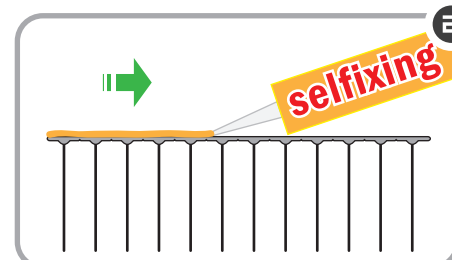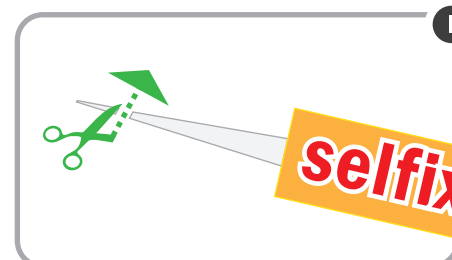

**ECOPIC**

ZAC DU MOULIN  
12 RUE DU MEUNIER  
95700 ROISSY EN FRANCE

PHONE : +33.1.73.27.20.40  
FAX : +33.1.30.11.24.55  
EMAIL : [ECOPIC@ECOPIC.COM](mailto:ECOPIC@ECOPIC.COM)

[WWW.ECOPIC.COM](http://WWW.ECOPIC.COM)

SAS AU CAPITAL DE 140 000€  
401 788 120 RCS PONTOISE  
SIRET 401 788 120 00046  
APE 4690 Z  
TVA FR 80 401 788 120